

# Point to Point Reversing With a Siding

Two trains back-and-forth reversing, alternating.



This hookup does not use sensors.  
The StationMaster can be the Reverser or XL version set for reversing mode.

The trains will accelerate and decelerate, stopping at the diode section.

Requires an isolator on each siding, and diodes on each end.

See the StationMaster manual for setting the reversing locations and in-between stops.

Isolators with diodes  
(3 places)  
Swap diode polarity if train does not stop.

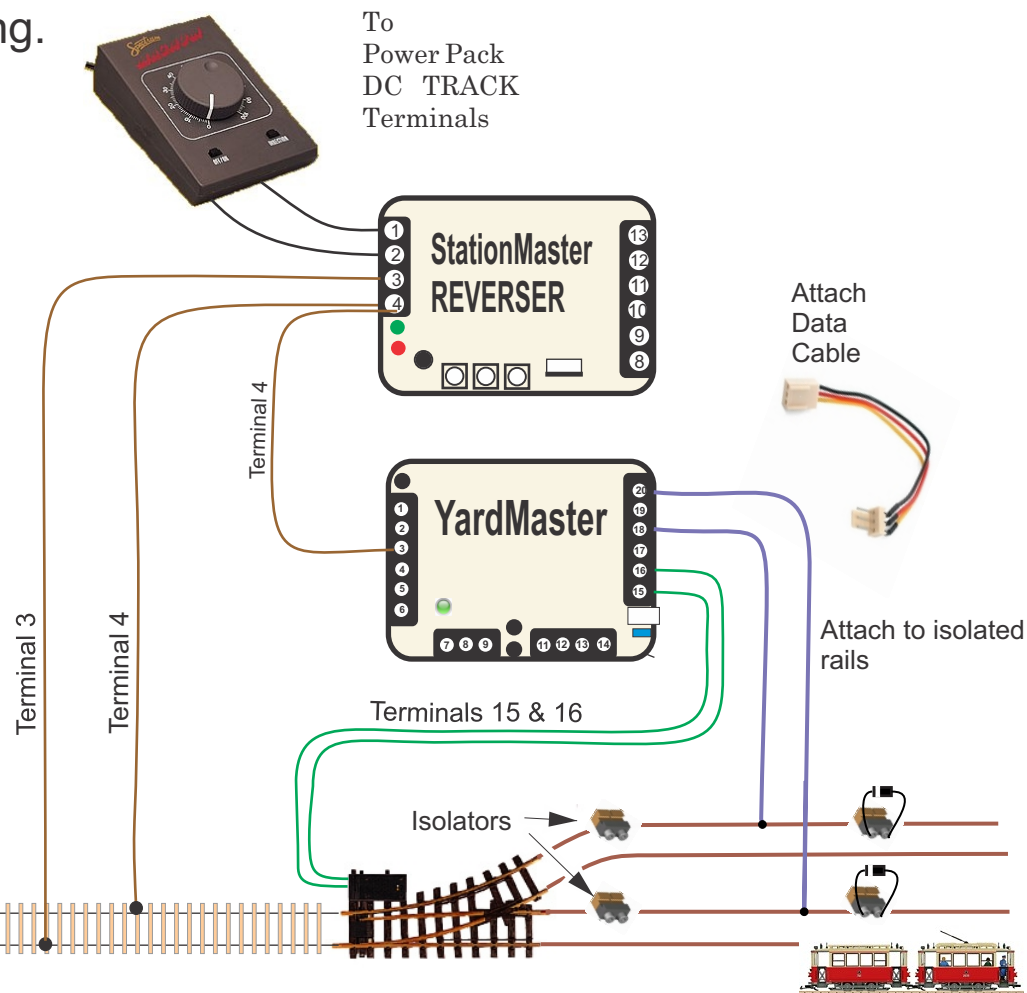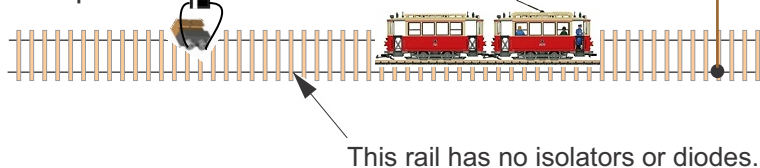

StationMaster Programming:  
\* Fire YardMaster in forward direction only.

The YardMaster will only fire when the train is going "forward".  
If the turnout switches on the wrong end then swap the wires in StationMaster pins 3 and 4.

